Self-Contained Emergency KELUAR Sign

PEX-215-LED (Super Bright LEDs)

PEX-215-LED




Specifications


MODEL	PEX-215-LED
MODE	Maintained
LIGHT SOURCE	18 nos SMD Super Bright LED
LAMP WATTAGE	1.2W
BATTERY	2.4V 1.7AH Ni-Cd
CHARGER	Constant current
BATTERY PROTECTION	Low voltage cut-off to prevent over discharge
MONITORING	Red LED "ON" indicates charging Equipped with push test switch to simulate power failure
BACK UP DURATION	3 hours
RECHARGE TIME	16-24 hours
INPUT VOLTAGE	240V +/- 10% 50Hz
INPUT POWER	3W
WEIGHT	1.2kg
HOUSING	EG steel with powder coated paint, acrylic diffuser
MOUNTING	Surface mount
DIMENSIONS (MM)	556mm (L) x 52mm (W) x 155mm (H)
INGRESS PROTECTION	IP-20
OPERATING TEMPERATURE	0ºC - 65ºC
COMPLIANCE	MS2687:2018 , MS619-2-22:2005 (IEC 60598-1:2020) , MS IEC 60598-1:2021

For further enquiries, please contact :
PNE SYSTEMS SDN. BHD. (263861 D)
No.3, Jalan SS26/13, Taman Mayang Jaya
47301, Petaling Jaya, Selangor Darul Ehsan.
Tel : (6)03-78037488 (Hunting)
Fax : (6)03-78038509
E-mail : sales@pnesys.com.my
Website : www.pnesys.com.my

Note : Due to continuous development and improvement, our company reserves the right to change specifications without notice.

PEX 215 LED
EMERGENCY 'KELUAR' SIGN

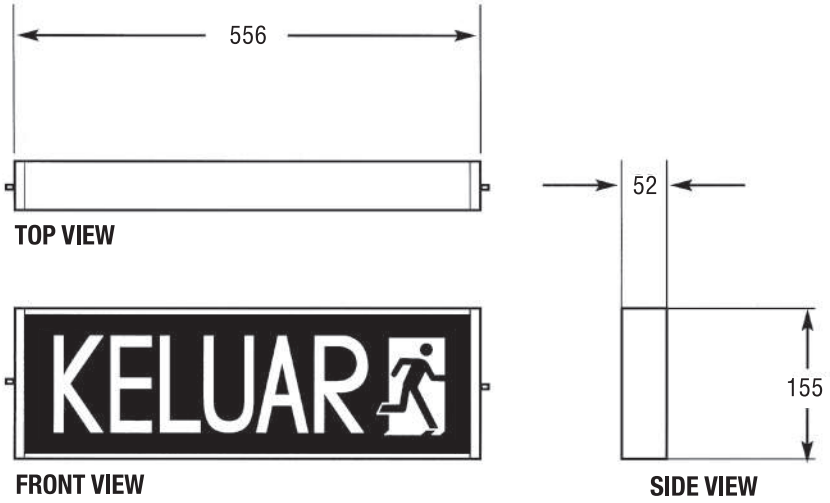

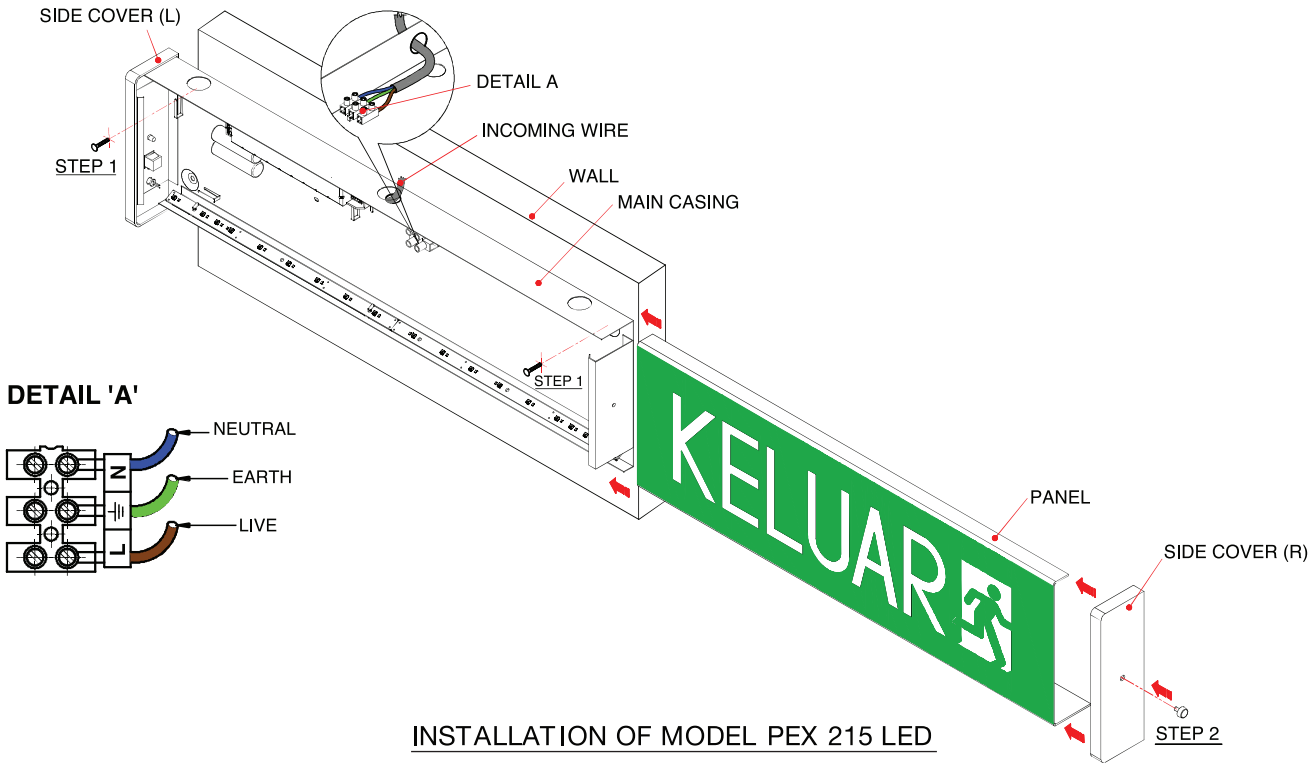

INSTALLATION OF MODEL PEX 215 LED

Ordering Guide

Model	PEX-215LED	Legend
Normal (Standard)	PEX-215LED	KELUAR
Single-side Arrow To Right	PEX-215LED / RA	KELUAR→
Single-side Arrow To Left	PEX-215LED / LA	←KELUAR
Single-side Arrow Straight Ahead	PEX-215LED / SA	KELUAR↑