



PEX 215F (WP)

Self-Contained Emergency KELUAR Sign

PEX 215F (WP)

LED Keluar sign c/w weather-proof housing



Specifications

Model	➔ PEX 215F (WP) (Weather-proof).
Mode	➔ Maintained.
Weight	➔ 1.64 Kg.
Battery	➔ 2 x 1.2V / 1.7AH (NiCad / NiMH).
Construction	➔ Injection moulded acrylic / polycarbonate diffuser. Injection moulded GRP base. Vinyl stick-on signage.
Ingress of protection	➔ IP 65.
Charger	➔ Constant current.
Mounting	➔ Surface mounting direct to wall or ceiling.
Dimension	➔ 670 mm (L) x 175 mm (W) x 105 mm (H).
Monitoring	➔ Red LED indicating healthy supply and charging.
Light source	➔ 18 nos super bright LED (SMD).
Input voltage	➔ 240 V +/- 10% 50/60 Hz.
Compliance	➔ SIRIM MS 983:2004. MS 619-2-22:2005 MS IEC 60598-1:2012 Jabatan Bomba dan Penyelamat Malaysia certified.
Recharge period	➔ 16 - 24 Hours.
Back up duration	➔ 3 Hours.
Power consumption	➔ < 5W.
Operating temperature	➔ 0 °C to 65 °C.

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)

No.3, Jalan SS26/13,
Taman Mayang Jaya 47301, Petaling Jaya,
Selangor Darul Ehsan, Malaysia

Tel : 603-78037488 (Hunting)


Fax : 603-78038509

E-mail : sales@pnesys.com.my


Website : www.pnesys.com.my




PEX 215F WP (WEATHER-PROOF) KELUAR SIGN

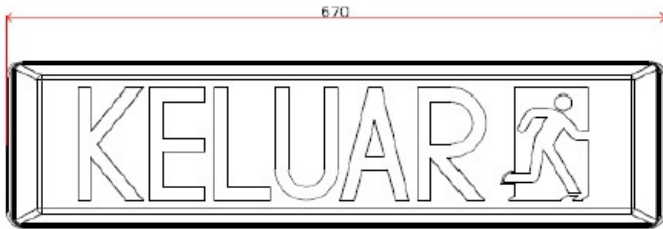


TOP VIEW

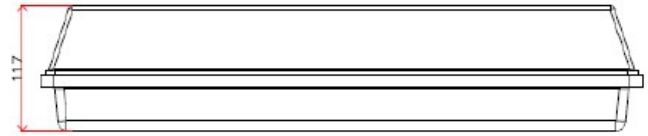


FRONT VIEW

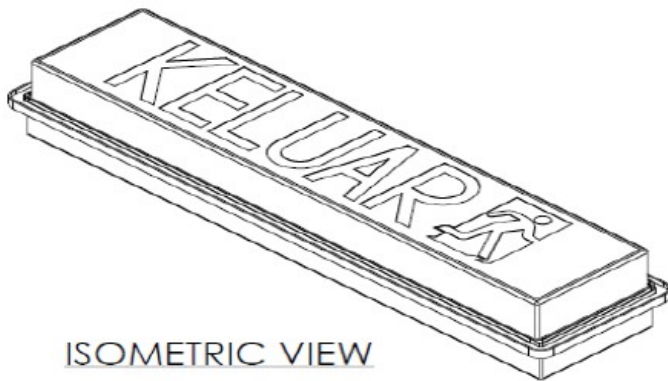

ISOMETRIC VIEW



SIDE VIEW

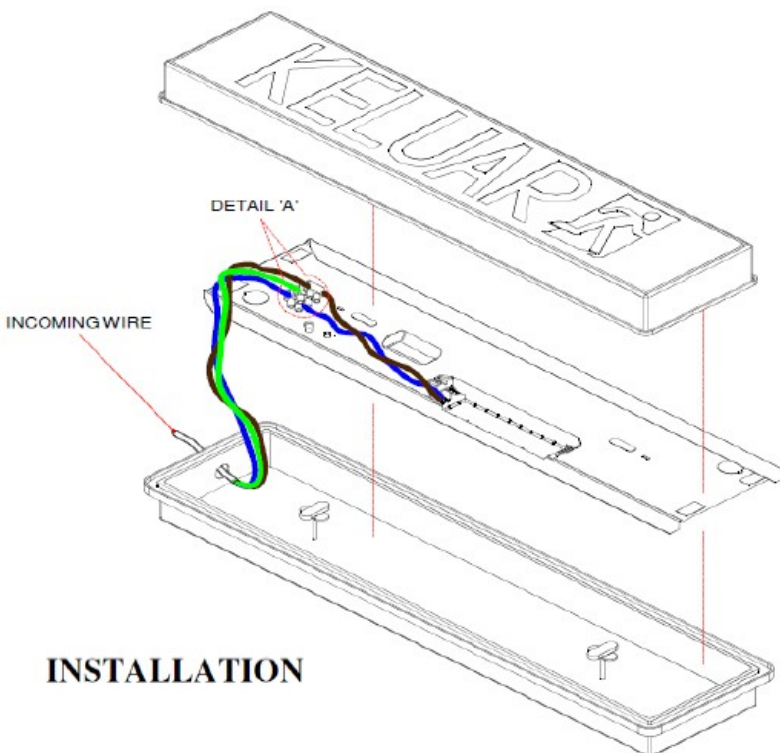

INSTALLATION

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)

No.3, Jalan SS26/13,
Taman Mayang Jaya 47301, Petaling Jaya,
Selangor Darul Ehsan, Malaysia

Tel : 603-78037488 (Hunting)

Fax : 603-78038509

E-mail : sales@pnesys.com.my

Website : www.pnesys.com.my