



PEX-215LED

Self-Contained Emergency KELUAR Sign



PEX-215LED (Super Bright LEDs)



Specifications

Model	➔	PEX-215 LED.
Light Source	➔	18 nos super bright LED (SMD).
LED Wattage	➔	~0.80W.
Mode	➔	Maintained.
Weight	➔	~1.2 Kg.
Battery	➔	2 x 1.2V 1.7AH Ni-Cd.
Housing	➔	Electro-galvanised sheet steel with powder coated paint.
Charger	➔	Constant current.
Mounting	➔	Surface mounting direct to wall or ceiling.
Dimension	➔	556mm (L) x 52mm (W) x 155mm (H).
Monitoring	➔	Red LED indicating healthy supply and charging.
Compliance	➔	MS 983 : 2004, MS 619-2-22:2005. MS IEC 60598-1 : 2012. Jabatan Bomba Dan Penyelamat Malaysia certified.
Input Voltage	➔	240 V +/- 10% 50Hz.
Recharge Period	➔	16 - 24 hours.
Back Up Duration	➔	3 hours.
Battery Protection	➔	Low voltage cut-off to prevent over discharging.
Input Power	➔	4.5W.
Ingress Of Protection	➔	IP-20.
Ambient Temperature	➔	40 °C.

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD.(263861 D)

No.3, Jalan SS26/13, Taman Mayang Jaya
47301, Petaling Jaya, Selangor Darul Ehsan.

Tel : (6)03-78037488 (Hunting)



Fax : (6)03-78038509

E-mail : sales@pnesys.com.my

Website : www.pnesys.com.my



PEX 215 LED EMERGENCY 'KELUAR' SIGN

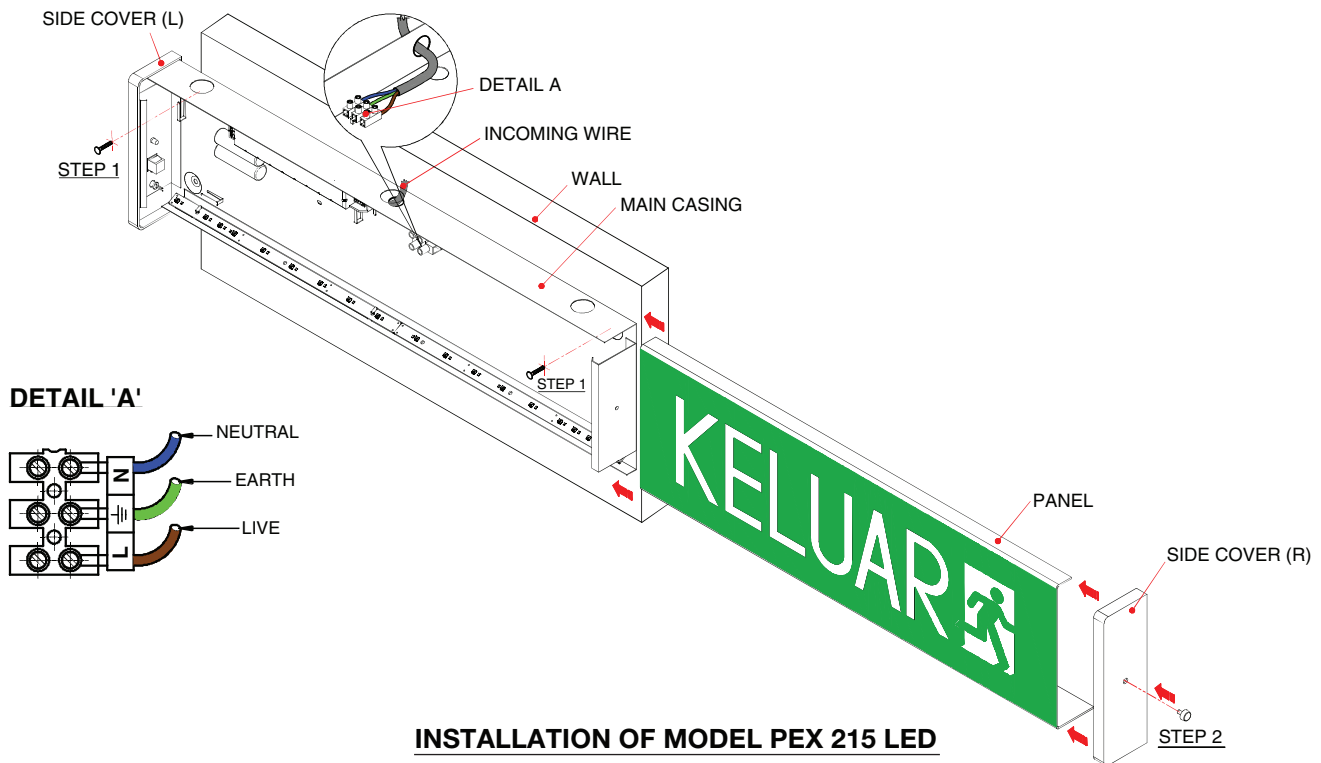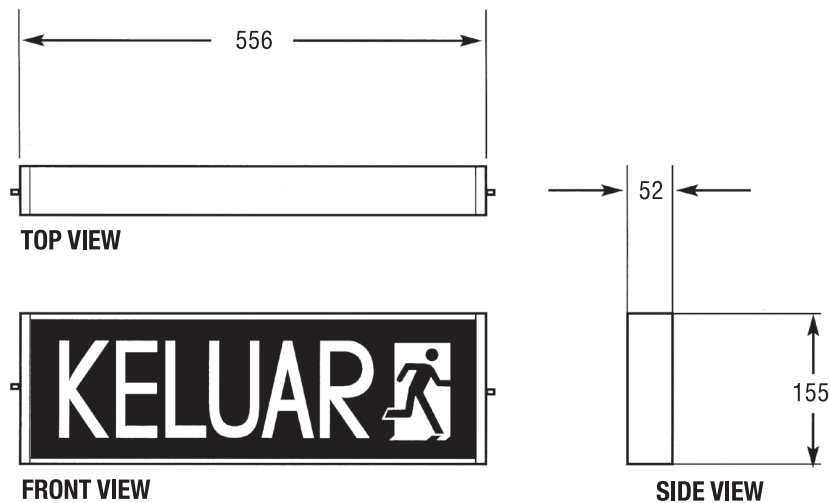

Ordering Guide

Model	PEX-215LED	Legend
Normal (Standard)	PEX-215LED	
Single-side Arrow To Right	PEX-215LED / RA	
Single-side Arrow To Left	PEX-215LED / LA	
Single-side Arrow Straight Ahead	PEX-215LED / SA	
Double-side with Arrow	PEX-215 DLED	