



PTH-322R

Self-Contained Emergency Luminaires

3.0W Power LED




Specifications

MODEL	PTH 322R.
MODE	Non-maintained.
WEIGHT	~ 600 gram.
BATTERY.....	3.6V, 1.7AH Ni-Cad Battery.
HOUSING.....	ABS + Electro-galvanised sheet steel.
CHARGER.....	Constant Current.
MOUNTING	Ceiling recess mount.
DIMENSION	Fitting : 41.8mm (H) x 95mm (Ø).
	Power Pack Module : 260mm (L) x 62mm (W) x 36mm (H).
MONITORING	Red LED indicating charging.
	Equipped with momentary switch to simulate power failure.
COMPLIANCE	SIRIM MS 619-2-22 : 2005. MS IEC 60598-1 : 2012.
	Jabatan Bomba dan Penyelamat Malaysia certified.
LIGHT SOURCE	3W COB Power LED.
INPUT VOLTAGE	240V +/- 10% 50/60Hz.
RECHARGE PERIOD	16-24 Hours.
BACK-UP DURATION	3 Hours.
BATTERY PROTECTION.....	Low voltage cut-off to prevent over discharging.
DEGREE OF PROTECTION.....	IP-20.
OPERATING TEMPERATURE	0 °C to 65 °C.

For further enquiries, please contact :-
PNE SYSTEMS SDN. BHD. (263861 D)
 No.3, Jln SS26/13, Taman Mayang Jaya
 47301, Petaling Jaya, Selangor Darul Ehsan.
 Tel : (6)03-78037488 (Hunting)
 Fax : (6)03-78038509
 E-mail : sales@pnesys.com.my
 Website : www.pnesys.com.my

MODEL : PTH 322R

Dimension

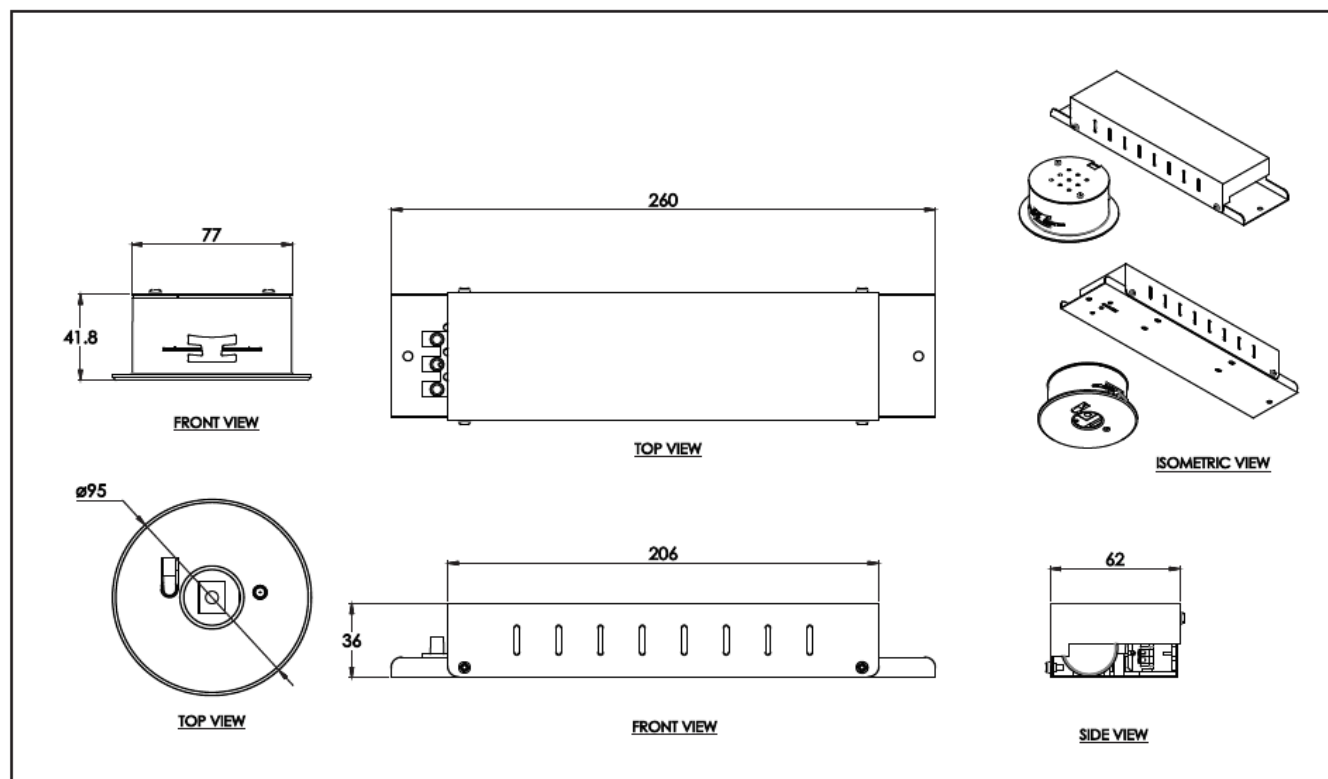

(Measurement in mm)

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)
No. 3, Jalan SS 26/13,
Taman Mayang Jaya, 47301 Petaling Jaya,
Selangor Darul Ehsan.
Tel : (6)03-78037488 (Hunting)
Fax : (6)03-78038509
E-mail : sales@pnesys.com.my
Website : www.pnesys.com.my



Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.