



PTH-322R

Self-Contained Emergency Luminaires



3.0W COB Power LED



Specifications

MODEL	PTH 322R.
LIGHT SOURCE	3W COB Power LED.
MODE	Non-maintained.
WEIGHT	~ 410 gram.
BATTERY.....	4.8V, 1.7AH / 1.8AH NICAD Battery.
HOUSING	PC + ABS + UV Plastic Fire Retardant.
CHARGER	Constant Current.
MOUNTING	Ceiling recess mount.
DIMENSION	Fitting : 98mm (H) x 95mm (Ø).
MONITORING	Red LED indicating healthy supply and charging. Equipped with momentary switch to simulate power failure.
COMPLIANCE	SIRIM MS 619-2-22 : 2005. MS IEC 60598-1 : 2012. Jabatan Bomba dan Penyelamat Malaysia certified.
INPUT VOLTAGE	240V +/- 10% 50/60Hz.
INPUT POWER.....	2.5W
RECHARGE PERIOD.....	16-24 Hours.
BACK-UP DURATION.....	3 Hours.
BATTERY PROTECTION.....	Low voltage cut-off to prevent over discharging.
DEGREE OF PROTECTION.....	IP-20.
OPERATING TEMPERATURE...	0 °C to 65 °C.
AMBIENT TEMPERATURE.....	40 °C.
RATED LUMEN OUTPUT.....	192 lm to 228 lm.

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)

No.3, Jln SS26/13, Taman Mayang Jaya
47301, Petaling Jaya, Selangor Darul Ehsan.


Tel : (6)03-78037488 (Hunting)

Fax : (6)03-78038509

E-mail : sales@pnesys.com.my

Website : www.pnesys.com.my

INSTALLATION OF PTH 322R EMERGENCY LUMINAIRE

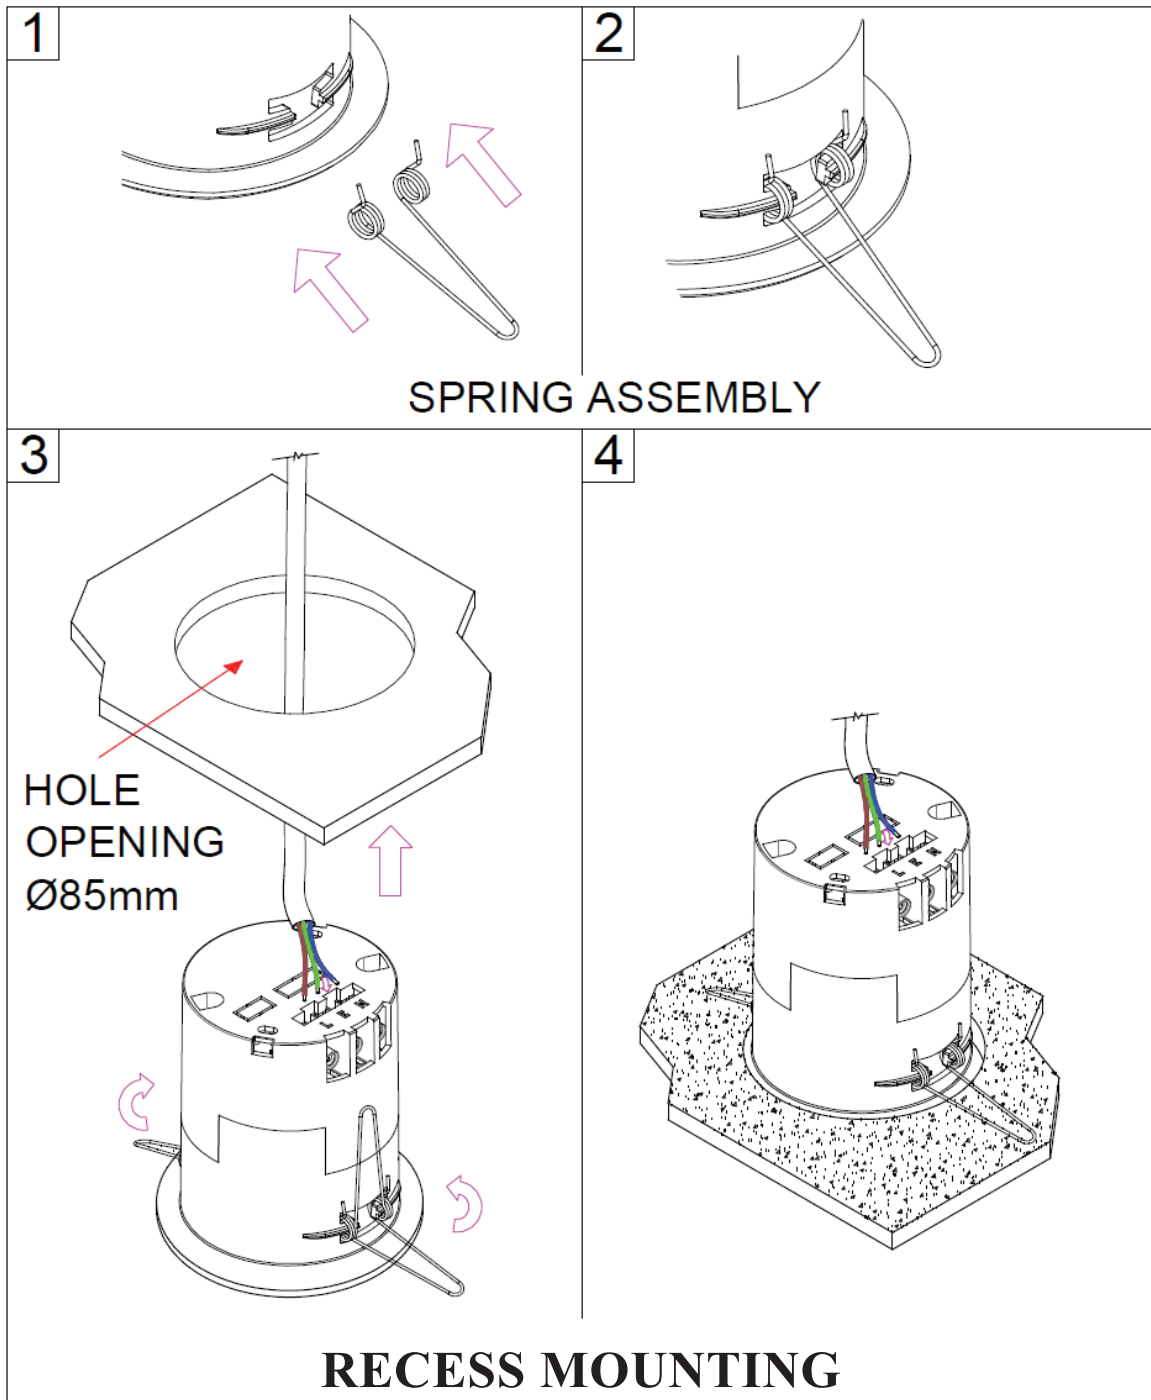

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)
No. 3, Jalan SS 26/13,
Taman Mayang Jaya, 47301 Petaling Jaya,
Selangor Darul Ehsan.
Tel : (6)03-78037488 (Hunting)
Fax : (6)03-78038509
E-mail : sales@pnesys.com.my
Website : www.pnesys.com.my



Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.