



Self-Contained Emergency KELUAR Sign

PEX-215-LED (Super Bright LEDs)

PEX-215-LED



Specifications



MODEL	➔ PEX-215-LED
MODE	➔ Maintained
LIGHT SOURCE	➔ 18 nos SMD Super Bright LED
LAMP WATTAGE	➔ 1.2W
BATTERY	➔ 2.4V 1.7AH Ni-Cd
CHARGER	➔ Constant current
BATTERY PROTECTION	➔ Low voltage cut-off to prevent over discharge
MONITORING	➔ Red LED "ON" indicates charging Equipped with push test switch to simulate power failure
BACK UP DURATION	➔ 3 hours
RECHARGE TIME	➔ 16-24 hours
INPUT VOLTAGE	➔ 240V +/- 10% 50Hz
INPUT POWER	➔ 3W
WEIGHT	➔ 1.2kg
HOUSING	➔ EG steel with powder coated paint, acrylic diffuser
MOUNTING	➔ Surface mount
DIMENSIONS (MM)	➔ 556mm (L) x 52mm (W) x 155mm (H)
INGRESS PROTECTION	➔ IP-20
COMPLIANCE	➔ MS2687:2018 , MS619-2-22:2005 (IEC 60598-1:2020) , MS IEC 60598-1:2021

For further enquiries, please contact :
PNE SYSTEMS SDN. BHD. (263861 D)
No.3, Jalan SS26/13, Taman Mayang Jaya
47301, Petaling Jaya, Selangor Darul Ehsan.
Tel : (6)03-78037488 (Hunting)
Fax : (6)03-78038509
E-mail : sales@pnesys.com.my
Website : www.pnesys.com.my

Note : Due to continuous development and improvement, our company reserves the right to change specifications without notice.



PEX 215 LED *EMERGENCY 'KELUAR' SIGN*

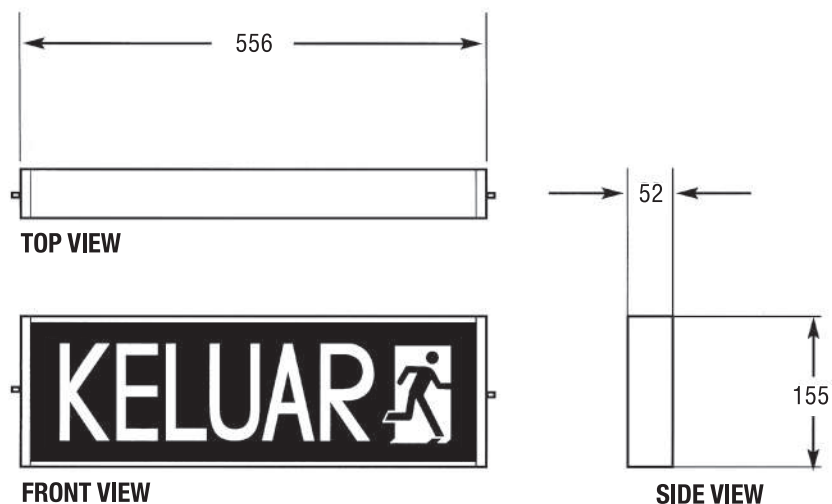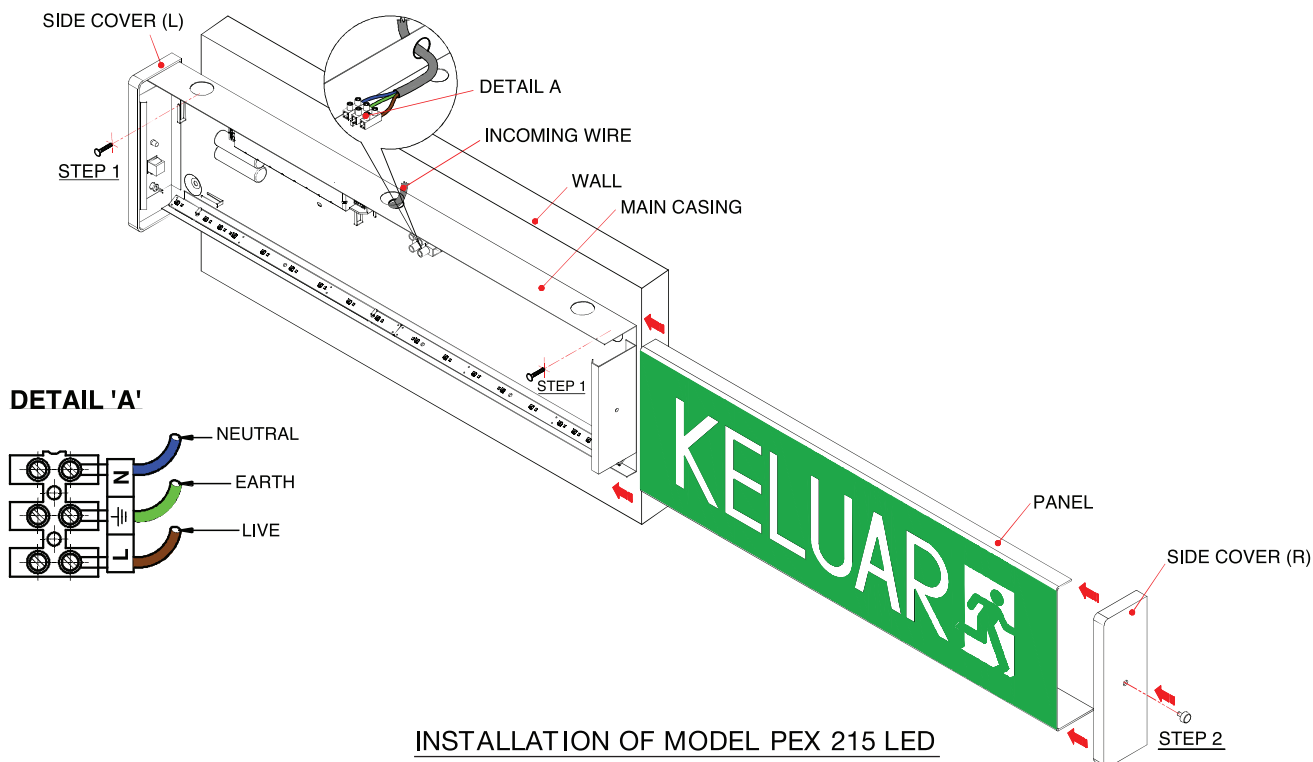

Ordering Guide

Model	PEX-215LED	Legend
Normal (Standard)	PEX-215LED	
Single-side Arrow To Right	PEX-215LED / RA	
Single-side Arrow To Left	PEX-215LED / LA	
Single-side Arrow Straight Ahead	PEX-215LED / SA	