Self-Contained Emergency Luminaire

2 x 3.0 Power LED

TEL-30-LED

TEL-30-LED




Specifications

MODEL	TEL-30-LED
MODE	Non-maintained
LIGHT SOURCE	2 x 3.0W High Power LED
LAMP WATTAGE	2 X 3.0W
RATED LUMEN OUTPUT	312 lm
BATTERY	4 X 1.2V, 4.5AH Ni-cad
CHARGER	Constant current
BATTERY PROTECTION	Low voltage cut-off to prevent over discharge
MONITORING	Red LED “ON” indicates charging Equipped with push test switch to simulate power failure
BACK UP DURATION	3 hours
RECHARGE TIME	16-24 hours
INPUT VOLTAGE	240V +/- 10% 50Hz/60Hz
INPUT POWER	2.8W
WEIGHT	~1.6 Kg
HOUSING	EG steel with power coated paint
LAMP HEAD ASSEMBLY	Aluminium diecast with glass diffuser (2 nos)
MOUNTING	Surface mount
DIMENSIONS (MM)	235mm (L) x 194mm (W) x 57mm (H)
INGRESS PROTECTION	IP-20
OPERATING TEMPERATURE	0°C - 65°C
COMPLIANCE	MS2687:2018 , MS619-2-22:2005 , MS IEC 60598-1:2021


For further enquiries, please contact :
PNE SYSTEMS SDN. BHD.(263861 D)
No.3, Jalan SS26/13, Taman Mayang Jaya
47301, Petaling Jaya, Selangor Darul Ehsan.
Tel : (6)03-78037488 (Hunting)
Fax : (6)03-78038509
E-mail : sales@pnesys.com.my
Website : www.pnesys.com.my

Note : Due to continuous development and improvement, our company reserves the right to change specifications without notice.


TEL 30 LED (2X3 WATT)

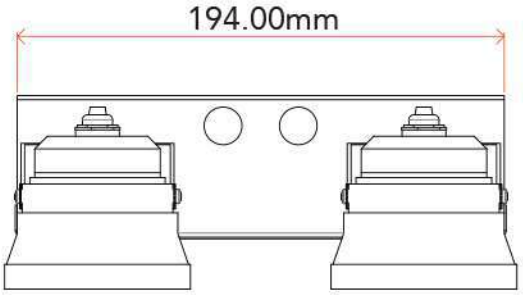


TOP VIEW

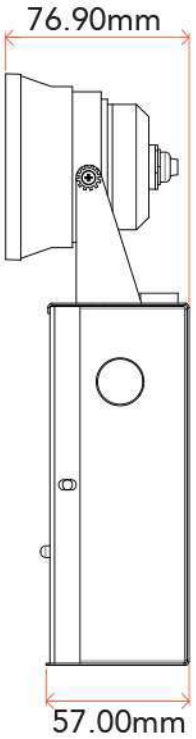

SIDE VIEW

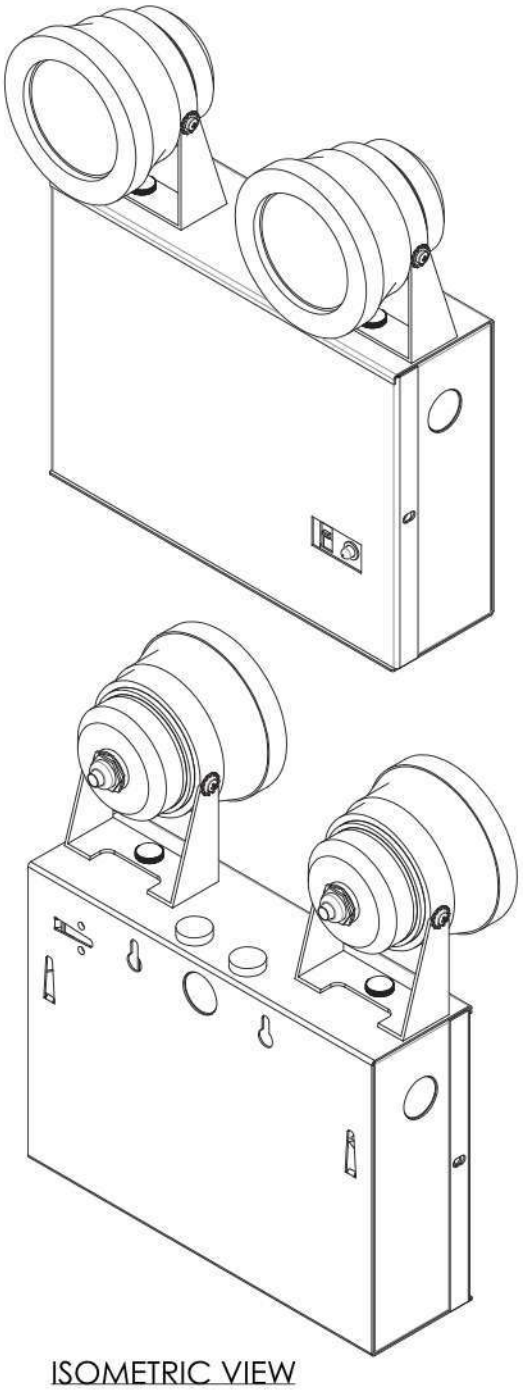

ISOMETRIC VIEW

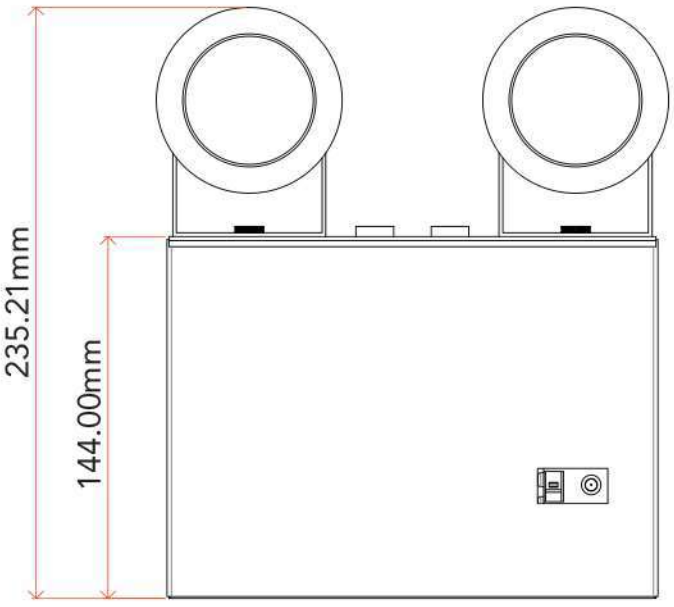

FRONT VIEW

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)

No.3, Jalan SS26/13,
Taman Mayang Jaya 47301,Petaling Jaya,
Selangor Darul Ehsan, Malaysia

Tel : 603-78037488 (Hunting)

Fax : 603-78038509

E-mail : sales@pnesys.com.my

Website : www.pnesys.com.my