



Self-Contained Emergency Luminaire

2 x 3.0 Power LED

TEL-30-LED

TEL-30-LED



Specifications

MODEL	➔ TEL-30-LED
MODE	➔ Non-maintained
LIGHT SOURCE	➔ 2 x 3.0W High Power LED
LAMP WATTAGE	➔ 2.8W
RATED LUMEN OUTPUT	➔ 312 lm
BATTERY	➔ 4 X 1.2V, 4.5AH Ni-cad
CHARGER.....	➔ Constant current
BATTERY PROTECTION	➔ Low voltage cut-off to prevent over discharge
MONITORING	➔ Red LED "ON" indicates charging Equipped with push test switch to simulate power failure
BACK UP DURATION	➔ 3 hours
RECHARGE TIME	➔ 16-24 hours
INPUT VOLTAGE	➔ 240V +/- 10% 50Hz/60Hz
INPUT POWER	➔ 2.8W
WEIGHT	➔ ~1.6 Kg
HOUSING	➔ EG steel with power coated paint
LAMP HEAD ASSEMBLY	➔ Aluminium diecast with glass diffuser (2 nos)
MOUNTING	➔ Surface mount
DIMENSIONS (MM)	➔ 235mm (L) x 194mm (W) x 57mm (H)
INGRESS PROTECTION	➔ IP-20
OPERATING TEMPERATURE	➔ 0°C - 65°C
COMPLIANCE	➔ MS2687:2018 , MS619-2-22:2005 , MS IEC 60598-1:2021

For further enquiries, please contact :

PNE SYSTEMS SDN. BHD. (263861 D)

No.3, Jalan SS26/13, Taman Mayang Jaya
47301, Petaling Jaya, Selangor Darul Ehsan.

Tel : (6)03-78037488 (Hunting)

Fax : (6)03-78038509


E-mail : sales@pnesys.com.my

Website : www.pnesys.com.my


Note : Due to continuous development and improvement, our company reserves the right to change specifications without notice.




TEL 30 LED (2X3 WATT)

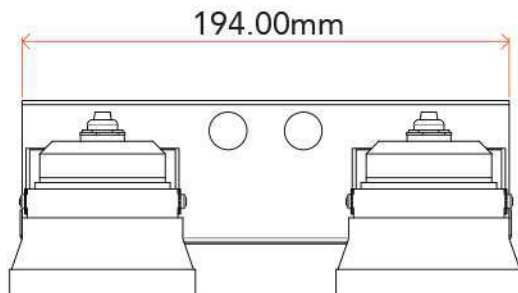



TOP VIEW

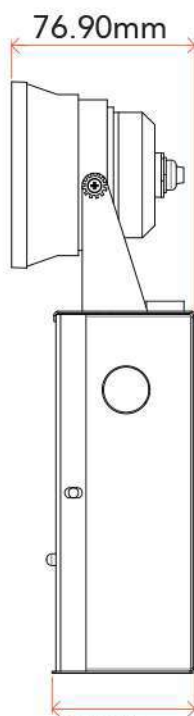

SIDE VIEW

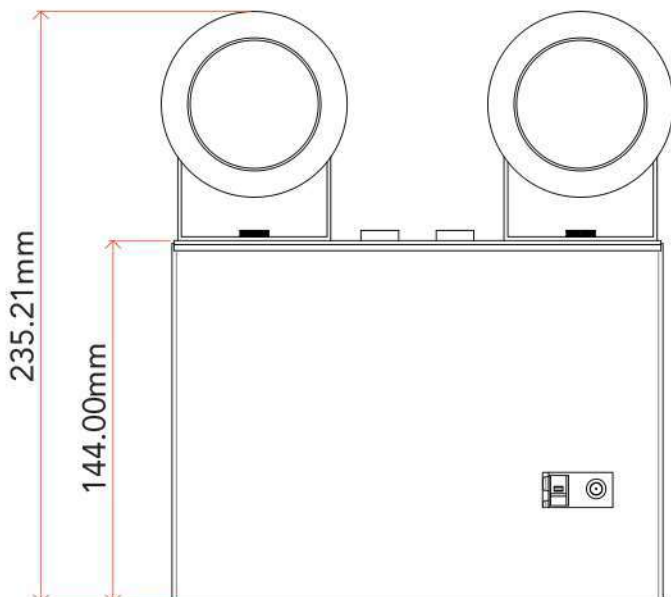

FRONT VIEW

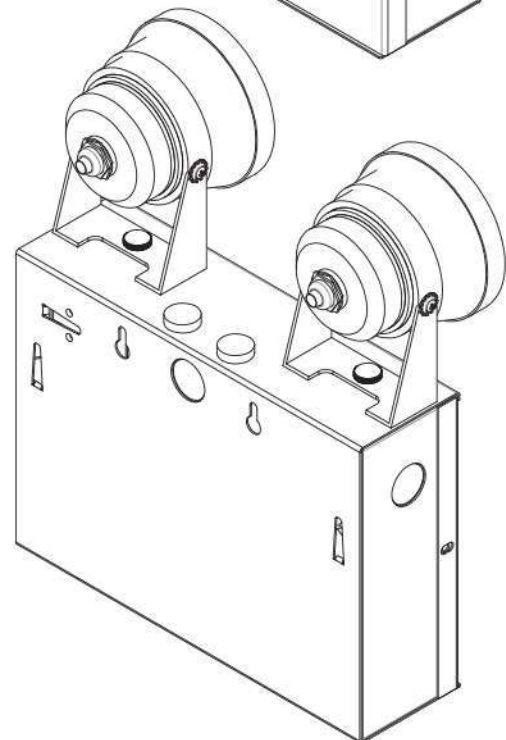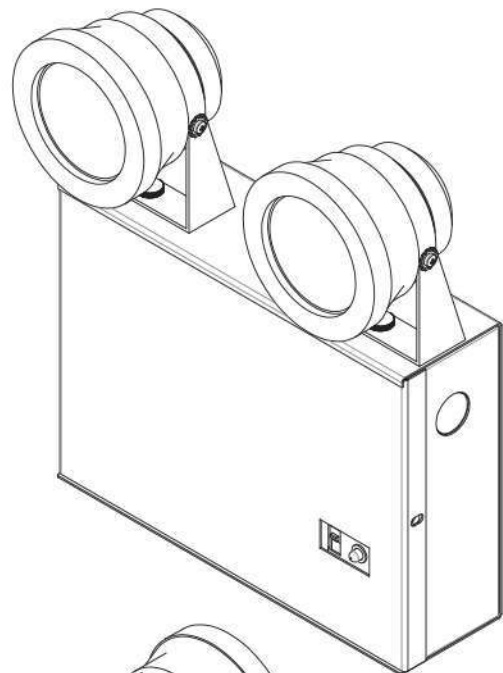

ISOMETRIC VIEW

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)

No.3, Jalan SS26/13,
Taman Mayang Jaya 47301, Petaling Jaya,
Selangor Darul Ehsan, Malaysia

Tel : 603-78037488 (Hunting)

Fax : 603-78038509

E-mail : sales@pnesys.com.my

Website : www.pnesys.com.my